

# Norfield



[norfield.com](http://norfield.com)

1-800-824-6242

## 450 FLOW-THROUGH STOP STITCHER

INCREASE PREHUNG DOOR OUTPUT WITH  
PRE-APPLIED STOP


ELIMINATE MANUAL STOP APPLICATION  
BOTTLENECK

CONSISTENT FASTENER COUNT, LOCATION,  
AND COUNTERSINK DEPTH




Throughput Rate

10-12  
jamb/minute




**FAST:** operator alternately feeds rights and lefts; power-feed wheels convey stitched jambs through machine.



**Accurate reveal:** stop reveal is constant and precise despite jamb imperfections.



**Quick change-overs:** 1-minute conversion between reveals for 1-3/8" & 1-3/4" doors

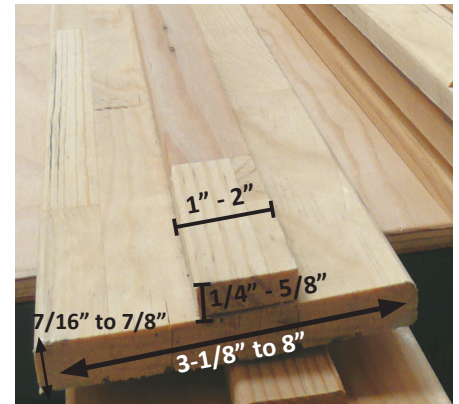

process	product	specs	features	options
	<p><b>450 Automatic Flow-through Stop Stitcher</b></p> <p>Automatic door stop-to-jamb fastening system</p>	<p>Jamb width 3-1/2" to 8" Jamb thickness 7/16" to 7/8" Jamb length infinite</p> <p>Stop width 1" to 2" Stop thickness 1/4" to 5/8"</p> <p>Reveal choices 1-1/2" 1-7/16" 1-13/16"</p> <p>Electrical 115V @ 60 Hz 5 Amps Pneumatic 6 CFM @ 120 psi Floor Space req. (min.) 9' x 20' Approx. Shipping Wt. 1100 lbs. Dim: 8'5"L x 3'3"W x 3'10"H</p>	<ul style="list-style-type: none"> <li>• Foot pedal actuation for hands-free operation</li> <li>• Available with staplers or brad nailers</li> <li>• Process square cut or mitred stop</li> <li>• Process rabbeted or dadoed ("lugged") jambs</li> <li>• No adjustments for jamb length or width</li> <li>• Safety guards to keep operators away from moving parts</li> </ul>	<ul style="list-style-type: none"> <li>• Extended parts warranty</li> </ul>